

SWING GATES

GATE-SPR

Mechanical Gate-SPR is effective entrance solution for areas where the passage width is not indicated. As far as telescopic leaf can be up to 1000 mm wide. Gate-SPR can be opened clockwise/ counterclockwise. The gate can be locked with a key.



UNIQUE TELESCOPIC ADJUSTABLE FLAG

ALLOWS TO FIT THE GATE TO ANY PASSAGE

 **700-1050**
mm
PASSAGE WIDTH

 **IP 41-65***
PROTECTIVE LEVEL

 **PASSAGE FOR DISABLED**

Advantages

- Adjustable tube makes GATE-SPR appropriate for installation sites where passage width is unknown in advance
- Solution for disabled and trolley access
- Appropriate addition to other TISO turnstiles
- Successful combination of affordable price and high quality
- Steadfast housing suitable for high traffic areas
- Gate housing could be adapted for both indoor and outdoor installations
- Can be mounted on a mobile platform (TISO Frame-M)

* first figure is standard, all other available upon request.



www.tiso.global
+380 (44) 291-21-11
e-mail: sales@tiso.global





Technical Specifications:

Passage width, mm	700 - 1050
Unit width, mm	865-1215
Unit diameter, mm	225
Unit height (with glass), mm	1000
Unit weight, kg (not more)	42
Mechanism	Mechanical

Materials

Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316 Polished SS AISI 304 Polished SS AISI 316 Powder coated RAL

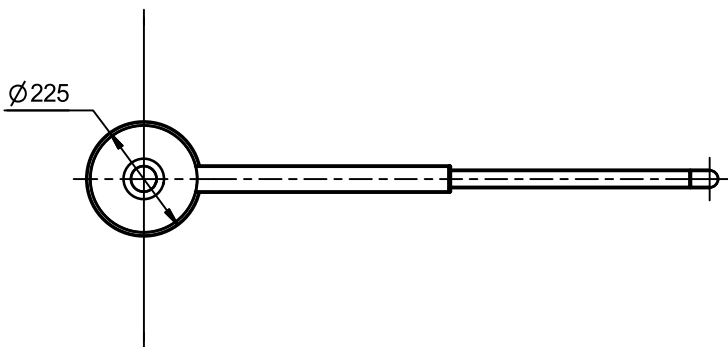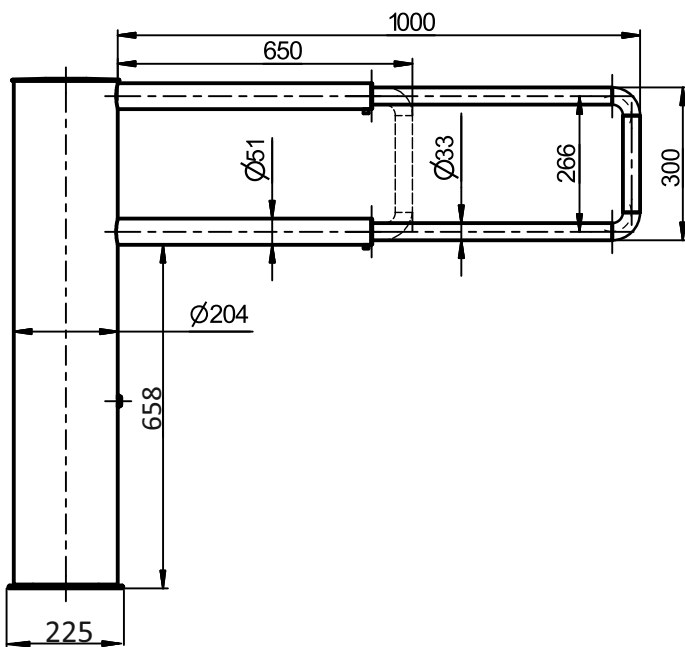

Installation areas:

- Governmental Institutions
- Military Bases
- Nuclear Power Plants
- Production sites (Industrial Plants)
- Commercial areas
- Financial institutions
- Airport Premises
- Business (Office) Centers
- Hotels
- Sport Complexes
- Recreation areas
- Urban areas
- Education Institutions
- others