

FULL-HEIGHT TURNSTILE PUSH&GO

Push&Go is fully mechanical type of a full height turnstile. This type of security barriers mostly applied at installations for one direction pedestrian access management. Cost effective solution which does not require any power supply. Can be supplied both in fully welded or assembly (attractive for transportation) design.



GREAT COMBINATION OF SECURITY PORT AND GATE FOR SPECIAL PURPOSES

 **60**
pers/min
CROSSING CAPACITY

 **980/1380**
mm
PASSAGE WIDTH

 **IP 41-65***
PROTECTIVE LEVEL

Advantages

- Superb quality and simple operation at a very low cost
- Stable and Robust housing suitable for high traffic areas
- Turnstile housing can be adapted for both indoor and outdoor installations
- Can be mounted on the TISO Frame M mobile platform
- Direction of rotation can be selected during installation

Push&Go Variants

- Left handed
- Right Handed

Ambient temperature range:

- Standart +1°C to +40°C, up to IP41
- Optional -20°C to +55°C, up to IP65

Installation areas:

- Governmental Institutions
- Military Bases
- Nuclear Power Plants
- Production sites (Industrial Plants)
- Commercial areas
- Financial institutions
- Airport Premises
- Business (Office) Centers
- Hotels
- Sport Complexes
- Recreation areas
- Urban areas
- Education Institutions
- others

* first figure is standard, all other available upon request.






www.tiso.global
+380 (44) 291-21-11
e-mail: sales@tiso.global



Technical Specifications:

Passage width, mm	980	1380
Unit width, mm	2180	2980
Diameter, mm	2000	2590
Unit height, mm	2298	
Weight, kg (not more)	300	380
Mechanism	Mechanical	

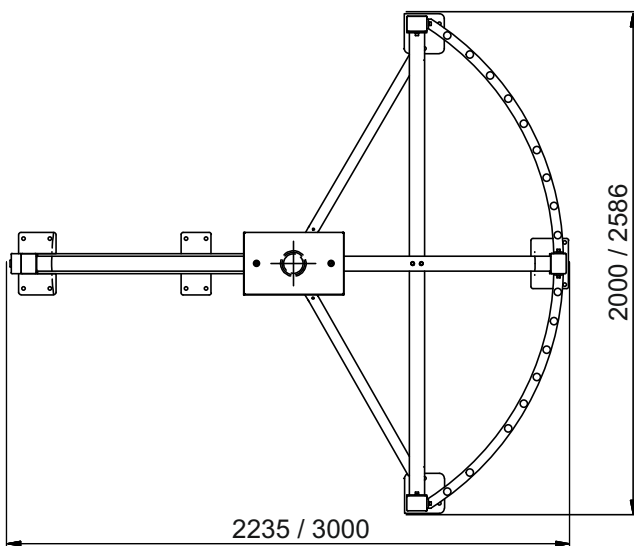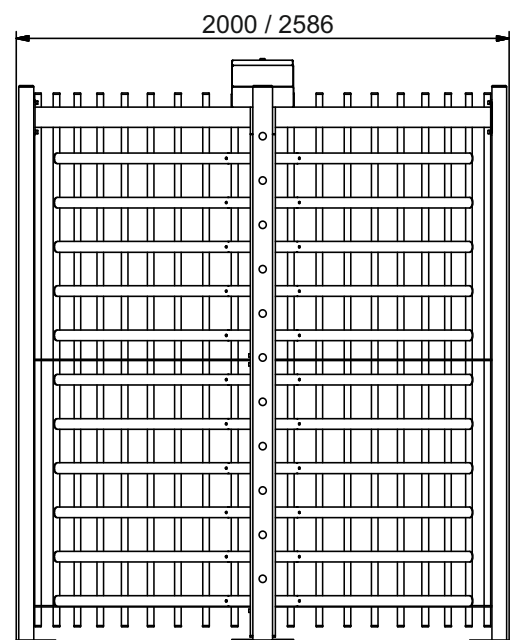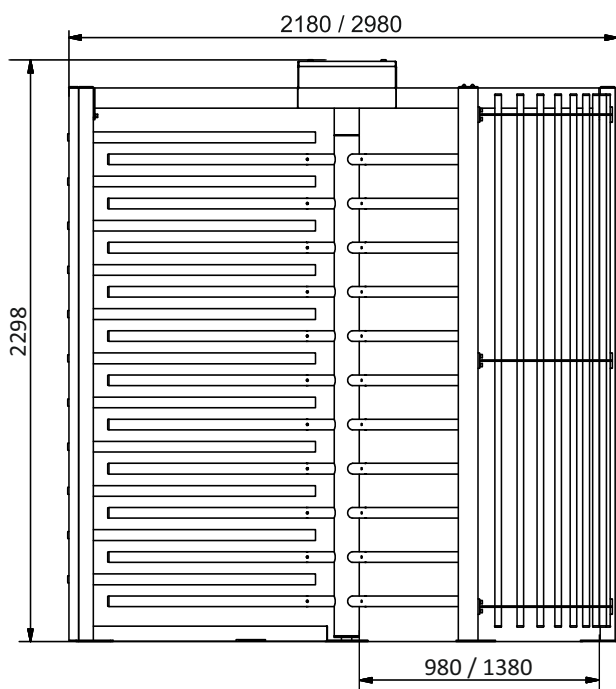

Materials

Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316 Polished SS AISI 304 Polished SS AISI 316 Powder coated RAL