


BluFi™ BLE – WiFi Gateways

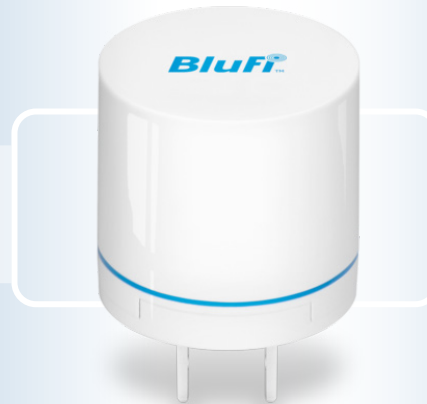

TECHNOLOGY HIGHLIGHTS:

- Bluetooth Smart 4.1 and WiFi compliant
- iBeacon (Apple), Eddystone (Google) and sBeacon (Bluision) supported concurrently
- Models for any standard A/C power outlet
- Location precision down to 6.6 ft (2m)
- Central management possible

BLUETOOTH SMART TO WIFI GATEWAYS FOR BEACON MANGEMENT

- **Cloud Enabled** – Bi-directional BLE to WiFi gateway for remote management
- **Smart** – Accurately measures distance to BLE Beacons for RTLS
- **Rapid Implementation** – Simply install at any conventional power plug

BluFi™ are Bluetooth Low-Energy (BLE) to Wifi gateways that relay signals between BEEKs Beacons and the cloud of HID Global's end-to-end IoT ecosystem. In combination with the corresponding Bluzone™ cloud services, BluFi enable BEEKs™ beacons to be centrally managed through the cloud, to transfer new messages, firmware updates, sensor data and battery status checks remotely. Their unique design allows BluFi devices and BEEKs beacons to broadcast reliably even in densely populated WiFi environments.

BEEKs and BluFi are not limited to standard beacon applications. HID Condition Monitoring Services, enabled by Bluision, include a range of sensor beacons for motion, temperature, light, vibration and even magnetic field. This sensor data is sent via BluFi gateways to the Bluzone Cloud to perform operational analysis for motorized equipment performance, capacity load, door open status etc. Alerts according to policy are received via e-mail or web service.

HID Global Location Services, enabled by Bluision, is an efficient real-time asset location and item management platform leveraging BEEKs beacons to effectively pin down the locations of assets inside a warehouse, campus or manufacturing hall. The calculation of the BEEKs location is based on received signal strength and other factors measured by BluFi devices installed in standard power plugs at the area that is to be monitored e.g. an office or manufacturing hall.

BluFi devices are available in four major international power plug versions and can be installed in any standard power outlet on a wall or ceiling. Battery powered or LTE enabled BluFi devices are available on request. BluFi devices make it easy and cost efficient to cover an area with BLE to internet connectivity to take advantage of centralized management, real-time condition monitoring or location services with a fraction of the effort required by alternative technologies.

APPLICATION AREAS:

Condition Monitoring

- Wireless status info on motorized equipment (on/off)
- Failure prediction based on vibration or temperature trends
- Reporting of equipment duty cycles
- Cold chain applications

Real-time location for assets


- Indoor position tracking of assets (Tools, portable equipment, vehicles)
- Position based alerting, heat-maps etc.

Retail advertisement

- BEEKs beacons may be used in iBeacon and/or Eddystone mode for advertising messages or location based services
- Central provisioning or monitoring via BluFi and Bluzone possible



SPECIFICATIONS

BluFi				
				
Base Model Number	BVBFUS (US)	BVBFEU (EU)	BVBFUK (UK)	BVBFAU (AU)
ELECTRONIC				
AC Input	100-240 VAC, 50/60 Hz			
AC Plugs	NEMA 1-15 ungrounded (Type A)	CEE 7/16 "Europlug" (Type C)	BS 1363 (Type G)	AS/NZS 3112 (Type I ungrounded)
Bluetooth Type	Bluetooth Low Energy 4.1			
Bluetooth Sensitivity	-98dBm			
WiFi Type	802.11 b/g/n			
WiFi Sensitivity	-97.5dBm @ 1DSSS -88.5dBm @ 11 CCK			
WiFi Frequency	2.4 Ghz with coexistence built-in with Bluetooth			
Processor Type	ARM Cortex M4 and ARM Cortex M3			
Memory	256KB Flash (100KB free for custom applications)			
Power Consumption	200mA when TX 20mA on sleep			
PHYSICAL				
Length x Width	2 x 1.5 x 1.5 in (50 x 38 x 38 mm)			
Housing Material	Polycarbonate and ABS			
Color	White			
Weight	1.3 oz (37 g)	1.6 oz (46 g)	1.7 oz (48 g)	1.6 oz (46 g)
CLOUD				
Type	Bluzone Cloud - Cloud realtime managed			
Data Output to Cloud	0.1 to 1Mbit Up data			
ENVIRONMENTAL REQUIREMENTS				
Temperature	-13° to +149° F (-25° to +65° C)			
OTHER				
Standards	FCC/CE/UL/FRE			
Options	Software configurable			
Box Size	1 pcs.			
Warranty	2 years			



hidglobal.com

North America: +1 512 776 9000
 Toll Free: 1 800 237 7769
 Europe, Middle East, Africa: +44 1440 714 850
 Asia Pacific: +852 3160 9800
 Latin America: +52 55 5081 1670

© 2017-2018 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, the Chain Design, and BEEKs, BluFi are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. 2018-01-05-idx-hid-bluzone-blu-fi-ds-en PLT-03334

An ASSA ABLOY Group brand

ASSA ABLOY

