

TRIPOD TURNSTILE

TWIX-M TWIN

Twix-M Twin is a two legs based modification of tripod access system. Extra rigidity and additional space for ID solutions integration are the main characteristics which make this type different from one leg turnstile entry systems.



THE MOST ELEGANT TRIPOD WITH FIRM 2 LEGS TO STAND ON

 **60**
pers / min
FREE ACCESS
(for each pass)

 **25**
pers / min
CROSSING CAPACITY
(for each pass)

 **600**
mm
MAX. PASSAGE WIDTH
(one side)

 **41–54***
PROTECTIVE LEVEL

 **DROP-ARM**

 **MOTORIZED**

 **BI-DIRECTIONAL**

Advantages

- Bi-directional motorized tripod turnstile with panic / bar drop-arm function
- High quality at a cost effective price
- Integration with any type of access control and ID systems
- Low power consumption
- Panic / bar drop-arm function with automatic reset
- Whisper quiet, low noise operation
- Optional indoor or outdoor housing types
- Wide range of accessories
- Availability of a back up battery connection
- Complete supply set as a standard

Standard

- 8 LED indicators
- Wired remote control
- Supply of backup battery power connection
- Anti-panic function with automatic reset

Options

- Preparation for various third-party devices (e.g. passage counter, RFID/Proximity/BioMetric readers, coin acceptor, push button, barcode and QR-code reader)
- Heating function for external installation (for cold climates)
- Cooling system
- Tripod Twin modification is available
- Dummy housings can be mounted adjacent to tripod turnstile

* first figure is for internal installation, second figure is for outdoor installation (up on request).



www.tiso.global
+380 (44) 291-21-11
e-mail: sales@tiso.global



Technical Specifications:

Unit width, mm	1004
Unit length, mm	1520
Unit height, mm	1000
Weight, kg (not more)	84
Mechanism	Motorized

Controlled by:



access control system;



push button control unit

Electrical Specifications:

- Voltage:
 - from the AC (100-240)V, 50/60Hz;
 - from a DC source 12 V;
- Maximum power consumption 55W per pass;

Ambient temperature range:


- Standart +1°C to +40°C, up to IP41
- Optional -20°C to +55°C, up to IP54

Materials

Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316 Polished SS AISI 304 Polished SS AISI 316 Powder coated RAL
Tripod hub	Cast aluminum with painted grey finishing

Installation areas:

- Governmental Institutions
- Military Bases
- Nuclear Power Plants
- Production sites (Industrial Plants)
- Commercial areas
- Financial institutions
- Airport Premises
- Business (Office) Centers
- Hotels
- Sport Complexes
- Recreation areas
- Urban areas
- Education Institutions
- others

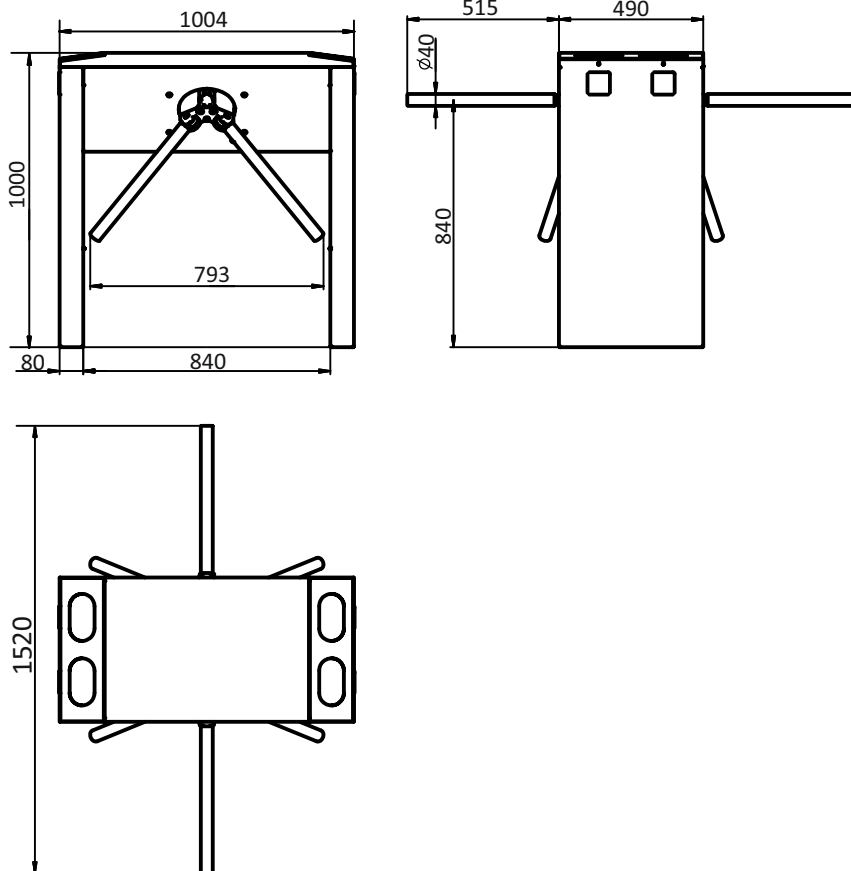

www.tiso.global
+380 (44) 291-21-11
e-mail: sales@tiso.global

